



## PROSKIRTING GILED



### DESCRIPTION

**PROSKIRTING GILED** is an aluminum and rigid vinyl resin skirting board profile. It is provided with an integrated LED lighting system that generates a soft and indirect light. It can be used as a skirting board and rotated of 180° it can be positioned along the ceiling. Its simultaneous use on floor and ceiling produces a particular effect of "suspended space", that combined with its design make it a very modern and elegant profile.

### MATERIAL

**PROSKIRTING GILED** is a skirting board profile, in the heights of 80 and 100 mm, in anodized silver aluminium and polished chrome aluminium and polished gold aluminium, with an insert in rigid vinyl resin. It is available in adhesive and punched version. The insert in rigid vinyl resin has a visible surface of 17.5 mm and is available with three different finishes; anodized silver aluminium, polished chrome aluminium and polished gold aluminium. The LED, that generates a soft and indirect light, can be fixed to the aluminium profile or to the insert in rigid vinyl resin. **PROSKIRTING GILED** can be used as a skirting board or can be rotated 180° to be positioned along the ceiling. It covers perimeter joints up to 15 mm. The light of the LED, that can be cold, hot and neutral, is reflected by the aluminium surface and produces a relaxing atmosphere. **PROSKIRTING GILED** thanks to its special pieces such as internal and external corners, junctions and end caps is a much sought-after profile that allows for a workmanlike finish.

### AREAS OF USE

**PROSKIRTING GILED** in aluminium is suitable for every indoors environment.



### WARNINGS

Do not use **PROSKIRTING GILED** in aluminium outdoors and in environments where particularly aggressive substances can be found. Do not use the adhesive version for ceiling applications and on porous supports.

### MAINTENANCE

**PROSKIRTING GILED** does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

### LAYING INSTRUCTIONS


1. Choose "**PROSKIRTING GILED**" in the desired height and finish.
2. Cut "**PROSKIRTING GILED**" to the desired length.

#### Adhesive version

3. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
4. After making sure that the surface is dry, remove the silicone film and place the profile correctly. Press it without hitting.
5. Fix the LED on the aluminium profile or on the vinyl resin rigid insert

#### Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm diameter tip and insert the 5 x 25 mm rawplugs.
5. Align the profile to the holes and screw it to the support.
6. Fix the LED to the aluminium profile or on the insert in rigid vinyl resin.

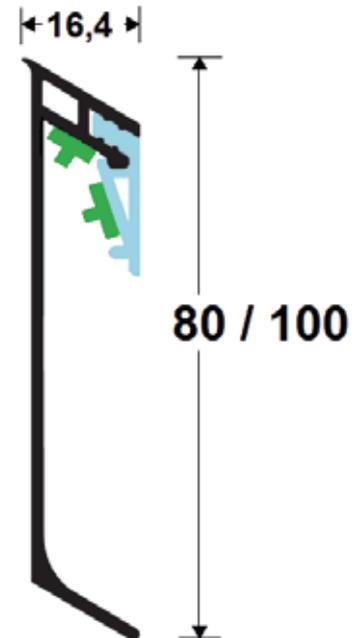

- Led
- Top in rigid vinyl resin

### TEXT TEMPLATE FOR TENDERS

Delivery and installation of skirting board / profile to be positioned along the ceiling, with adhesive / to fix with screws, in anodized silver aluminium / polished chrome aluminium, with height of 80 / 100 mm. The profile, that covers perimeter joints with 15 mm width, is equipped with an insert in rigid vinyl resin. The insert, with a visible surface of 17.5 mm, has a finish in anodized silver aluminium / polished chrome aluminium / polished gold aluminium. The profile is provided with an integrated LED lighting system that generates cold / hot / neutral light, like **PROSKIRTING GILED** of the Progress Profiles company.

**PKGLED... 80 / 100:** Anodized and polished aluminium.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt